

EN 60598-1	230V / 50Hz	IP 54	IK 10		CE	70W
------------	-------------	-------	-------	--	----	-----



Domeniul de utilizare: Balizarea obstacolelor aeriene fixe sub 3000m alt. Categoria lampă de mică intensitate tip A (10 cd)

Descriere:

Carcasa: (una pentru lampa principală și una pentru lampa de rezervă) din aluminiu, turnată sub presiune, vopsită galben

Ramă: Din aliaj de aluminiu, turnată sub presiune, vopsită galben

Dispersor: Din PC roșu (la cerere galben, transparent sau albastru)

Cutia aparataj : Din aliaj de aluminiu turnat sub presiune în care se află un releu care comută automat pe lampa de rezervă, în cazul defectării lămpii principale, semnalizând totodată defecțiunea pe panoul de control al dispecerului

Montaj:
- pe țevă cu diametrul de 60mm printr-o brățară metalică zincată

Sursa: Incandescentă-trafic

Dulie: E27

Certificat: LBO-09/2000

Standard: SR EN 60598-1

Application: Beaconage of fixed aerial obstacles under 3000m alt. Low- intensity light type A (10 cd)

Description:

Body: Diecast yellow painted aluminum alloy (one for the main lamp and one for the spare lamp)

Frame: Pressure diecast yellow painted aluminum alloy

Diffuser : Red PC (yellow, transparent, or blue on request)

Gear box : In the diecast aluminum alloy gear box a change-over relay is mounted in order to switch on the reserve lamp when the main lamp fails, and also to signalize this disturbance on the operator's control panel




Mounting:
- by a zinc - plated metallic collar on a pole with 60 mm diameter

Source: Incandescent-traffic

Socket: E27

Certificate: LBO-09/2000

Standard: SR EN 60598-1

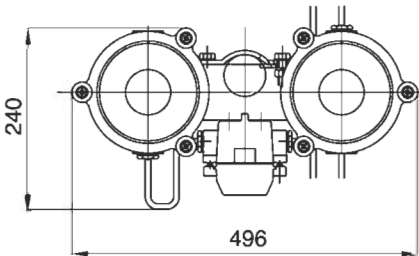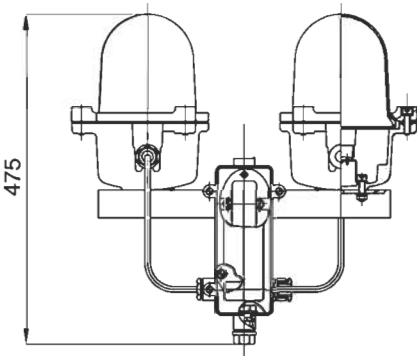

- * - Produs supus recertificării.
Pentru noile surse contactați producătorul
- * - Product subject to recertification.
For new lamps contact manufacturer.

Tip/Type	Cod produs/ Product code	Mod de fixare/ Fastening mode	Masa/ Weight [kg]	Lampa/ Lamp
2x100W	45461020	pe stâlp / on pole	7.85	A65

