




EN 60598-1	230V / 50Hz	IP 20	IP 30			RoHS	40W / 60W
------------	-------------	-------	-------	--	--	------	-----------

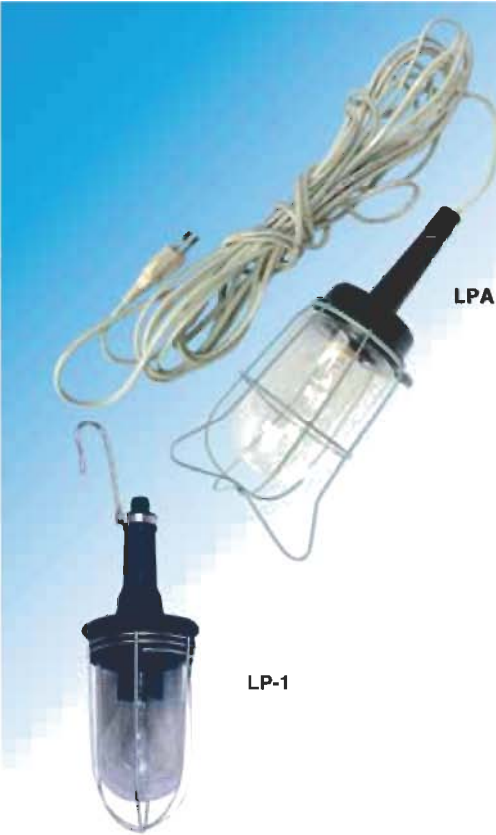

Domeniul de utilizare: Iluminatul local în zone greu accesibile pentru alte sisteme de iluminat, în ateliere industriale, garaje, etc. cu alimentare direct de la rețea 230V / 50 Hz

Descriere:

Corp:
- din bachelită (LPA)
- din cauciuc (LP 1)

Coș de protecție: Din sârmă de oțel acoperit anticoroziv

Apărător: Din sticlă clară transparentă

Cordon electric flexibil cu fișă injectată

Sursa: Incandescentă (A60), lampă halogen eco-clasică (LH)

Dulie: E27

Standard: SR EN 60598-1

Application: Local lighting for areas where it is difficult to implement other lighting systems, in industrial workshops, garages, etc. with a direct supply line for the 230V/50 Hz network

Description:

Body:
- bakelite LPA
- rubber LP 1

Safety basket: Anticorrosive coated steel wire

Protective window: Clear glass


Flexible electrical cord with injected wireplug

Source: Incandescent (A60), eco-classic halogen lamp


Socket: E27

Standard: SR EN 60598-1

LPA

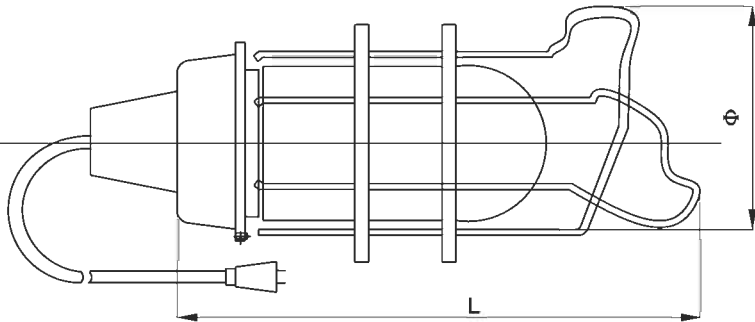

LP-1

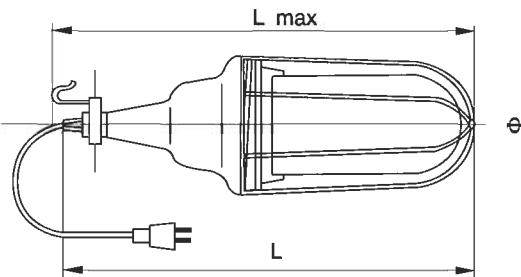

Tip/Type	Cod produs/ Product code	Dimensiuni/Dimensions [mm]			Masa/ Weight [kg]	Lampa/ Lamp
		L	φ	L max		
LPA 1x60W	45241013	356	166	-	1.25	A60 /
LP-1 1x40W cu reflector / with reflector	41331114	310	106	360	1.20	LH