



EN 60598-1	230V / 50Hz	IP 40	IK 07		960°C	CE	RoHS	18W / 36W
------------	-------------	-------	-------	--	-------	----	------	-----------

Domeniul de utilizare: Iluminatul general de interior

Descriere:

Corp: Armătură din tablă de oțel vopsită cu pulbere

Dispersor: Din PMMA opal (O) sau transparent texturat (T)

Montaj: Încăstrat în tavan fals modular

La cerere poate fi echipat cu balast electronic, aparataj pentru reglaj de flux, conector rapid WIELAND sau bloc de conectare "PUSH-IN", kit montaj rapid

Sursa: Tub fluorescent (T8) și tuburi cu LED

Dulie: G13

Standard: SR EN 60598-1

Application: General indoor lighting

Description:

Body: Steel sheet body, painted with powder

Diffuser: Opal (O) or transparent patterned (T) PMMA



Mounting: Recessed in false modular ceiling

On request may be fitted with electronic ballast (dimmable version also), WIELAND connector or block connector "PUSH-IN", fast installation kit

Source: Tubular fluorescent lamp (T8) and tubular LED lamp

Socket: G13



Standard: SR EN 60598-1




conector
WIELAND/
connector




conector
PUSH-IN/
connector

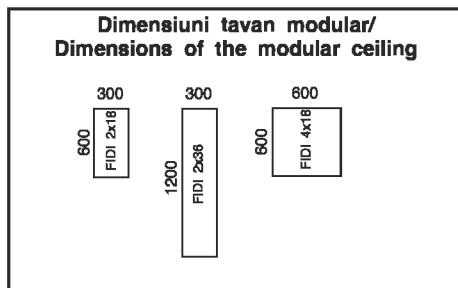

FIDI-03-418 O; T

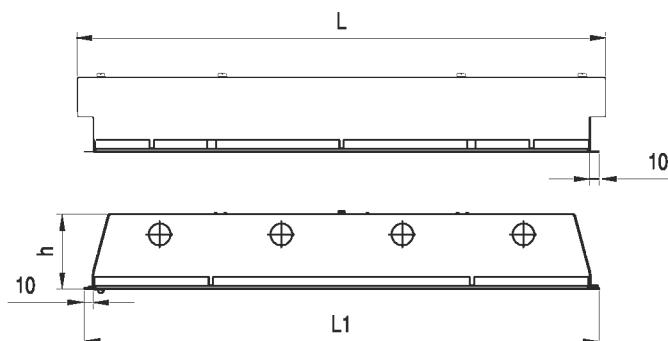

FIDI-03-218 O; 236 O
FIDI-03-218 T; 236 T

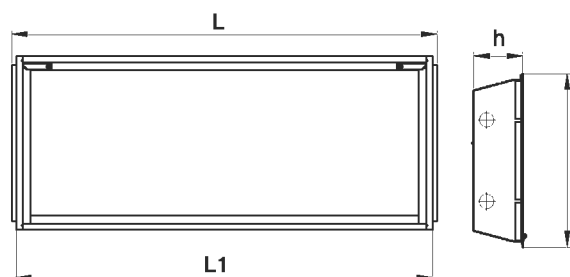

Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]				Masa/ Weight [kg]	Lampa/ Lamp
			L	L1	l	h		
2x18W transparent	21432060	min. 0.92	620	595	297	86.5	3.00	T8 φ 26
2x18W opal	21432061	min. 0.92	620	595	297	86.5	3.00	
2x36W transparent	21442105	min. 0.92	1220	1196	297	86.5	5.50	
2x36W opal	21442106	min. 0.92	1220	1196	297	86.5	5.50	
4x18W transparent	21434083	min. 0.92	620	595	595	86.5	4.70	
4x18W opal	21434084	min. 0.92	620	595	595	86.5	4.70	

*transparent texturat - transparent patterned

*opal - opal

*Codurile pentru produse echipate cu tuburi LED se regăsesc la pg. 252 / The product code for equipping with LED tube to be found on pg. 252