



EN 60598-1	230V / 50Hz	IP 40	IK 07			960°C	CE	RoHS	18W / 36W / 58W
------------	-------------	-------	-------	--	--	-------	----	------	-----------------

Domeniul de utilizare: Iluminatul general de interior

Descriere:

Corp: Armătură din tablă de oțel vopsită cu pulbere
Reflector: Tablă de aluminiu oglindată, cu coeficient de reflexie > 0.85, în variantele:
- dublu parabolic (DP): varianta de bază la 18w-7 lamele, 36w-16 lamele;
- simplu parabolic (SP): varianta de bază la 18w-9 lamele, 36w-20 lamele;
- drept (DR): varianta de bază la 18w-7 lamele

La cerere poate fi echipat cu balast electronic reglabil-HF-R (cu excepția variantelor 118, 218), aparataj pentru iluminat de siguranță, suspensii și bloc de conectare "PUSH-IN"

Montaj: Aparent/suspendat

Sursa: Tub fluorescent (T8) și tuburi cu LED

Dulie: G13

Standard: SR EN 60598-1

Application: General indoor lighting

Description:

Body: Steel sheet body, painted with powder
Reflector: Mirrored aluminum sheet reflector with a reflection factor > 0.85 in the following variants:
- double parabolic (DP): main variant for 18w-7 lamellas, 36w-16 lamellas;
- single parabolic (SP): main variant for 18w-9 lamellas, 36w-20 lamellas;
- flat (DR): main variant for 18w-7 lamellas

On request may be fitted with dimmable electronic ballast HF-R (except for the 118, 218 variants), emergency lighting kit, suspension cables and block connector "PUSH-IN"

Mounting: Visible/suspended

Source: Tubular fluorescent lamp (T8) and tubular LED lamp

Socket: G13

Standard: SR EN 60598-1



FIRA-03 suspensii/ suspension cables



conector PUSH-IN/ connector




DP




SP




DR




FIRA-03-118; 136; 158




pg.288

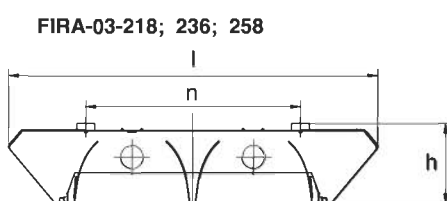


FIRA-03-218; 236; 258

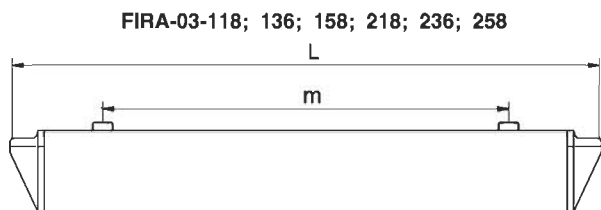


FIRA-03-118; 136; 158; 218; 236; 258

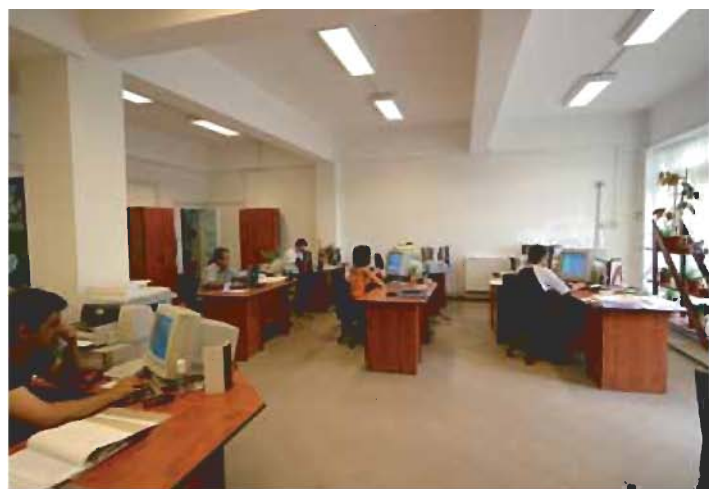

FIRA-03-418; 436; 458

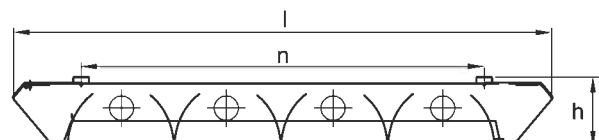

FIRA-03-418; 436; 458

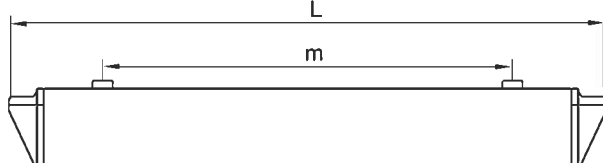

Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]					Masa/ Weight [kg]	Lampa/ Lamp
			L	m	l	h	n		
1x18W SP	21331148	min. 0.92	665.5	450	242	89	110	2.00	T8  φ 26
1x18W SP HF-S	21331160	>0.96	665.5	450	242	89	110	1.80	
1x18W SP HF-P	21331156	>0.96	665.5	450	242	89	110	1.80	
1x18W DP	21331146	min. 0.92	665.5	450	242	89	110	2.00	
1x18W DP HF-S	21331159	>0.96	665.5	450	242	89	110	1.80	
1x18W DP HF-P	21331152	>0.96	665.5	450	242	89	110	1.80	
1x36W SP	21341148	min. 0.92	1276	900	242	89	110	3.00	
1x36W SP HF-S	21341150	>0.96	1276	900	242	89	110	2.75	
1x36W SP HF-P	21341165	>0.96	1276	900	242	89	110	2.75	
1x36W DP	21341146	min. 0.92	1276	900	242	89	110	3.00	
1x36W DP HF-S	21341152	>0.96	1276	900	242	89	110	2.75	
1x36W DP HF-P	21341166	>0.96	1276	900	242	89	110	2.75	
1x58W SP	21351148	min. 0.92	1578	1202	242	89	110	4.46	
1x58W SP HF-S	21351150	>0.96	1578	1202	242	89	110	3.76	
1x58W SP HF-P	21351158	>0.96	1578	1202	242	89	110	3.76	
1x58W DP	21351146	min. 0.92	1578	1202	242	89	110	4.46	
1x58W DP HF-S	21351152	>0.96	1578	1202	242	89	110	3.76	
1x58W DP HF-P	21351157	>0.96	1578	1202	242	89	110	3.76	
2x18W SP	21332057	min. 0.92	697	360	406	89	250	2.80	
2x18W SP HF-S	21332152	>0.96	697	360	406	89	250	2.60	
2x18W SP HF-P	21332083	>0.96	697	360	406	89	250	2.60	
2x18W DP	21332059	min. 0.92	697	360	406	89	250	2.80	
2x18W DP HF-S	21332151	>0.96	697	360	406	89	250	2.60	
2x18W DP HF-P	21332081	>0.96	697	360	406	89	250	2.60	
2x36W SP	21342116	min. 0.92	1306	950	406	89	250	5.40	
2x36W SP HF-S	21342135	>0.96	1306	950	406	89	250	4.70	
2x36W SP HF-P	21342015	>0.96	1306	950	406	89	250	4.70	
2x36W DP	21342118	min. 0.92	1306	950	406	89	250	5.40	
2x36W DP HF-S	21342133	>0.96	1306	950	406	89	250	4.70	
2x36W DP HF-P	21342016	>0.96	1306	950	406	89	250	4.70	
2x58W SP	21352025	min. 0.92	1610	1200	406	89	250	8.20	
2x58W SP HF-S	21352034	>0.96	1610	1200	406	89	250	6.55	
2x58W SP HF-P	21352115	>0.96	1610	1200	406	89	250	6.55	
2x58W DP	21352021	min. 0.92	1610	1200	406	89	250	8.20	
2x58W DP HF-S	21352032	>0.96	1610	1200	406	89	250	6.55	
2x58W DP HF-P	21352114	>0.96	1610	1200	406	89	250	6.55	
4x18W SP 5 lamele	21334142	min. 0.92	703.5	520	703.5	89	520	4.70	
4x18W SP 9 lamele	21334132	min. 0.92	703.5	520	703.5	89	520	4.80	
4x18W SP 9 lamele HF-S	21334170	>0.96	703.5	520	703.5	89	520	4.15	
4x18W SP 9 lamele HF-P	21334317	>0.96	703.5	520	703.5	89	520	4.15	
4x18W DP 7 lamele	21334134	min. 0.92	703.5	520	703.5	89	520	4.80	
4x18W DP 7 lamele HF-S	21334173	>0.96	703.5	520	703.5	89	520	4.15	
4x18W DP 7 lamele HF-P	21334318	>0.96	703.5	520	703.5	89	520	4.15	
4x18W DR 7 lamele	21334153	min. 0.92	703.5	520	703.5	89	520	4.80	
4x18W DR 7 lamele HF-S	21334176	>0.96	703.5	520	703.5	89	520	4.15	
4x18W DR 7 lamele HF-P	21334316	>0.96	703.5	520	703.5	89	520	4.15	
4x36W SP	21344022	min. 0.92	1333	900	703.5	89	520	9.00	
4x36W DP	21344024	min. 0.92	1333	900	703.5	89	520	9.00	
4x58W DP	21354014	min. 0.92	1636	1100	703.5	86	520	12.00	
4x58W SP	21354012	min. 0.92	1636	1100	703.5	86	520	12.00	

*lamele / lamellas

*Codurile pentru produse echipate cu tuburi LED se regăsesc la pg. 252 / The product code for equipping with LED tube to be found on pg. 252