



EN 60598-1	230V / 50Hz	IP 66	IK 08		960°C	CE	RoHS	250W / 400W
------------	-------------	-------	-------	--	-------	----	------	-------------

Domeniul de utilizare:
Iluminatul general pentru spații de înălțime medie (până la 6-8 m)

Descriere:

Corp: Armătură din tablă de oțel vopsită cu pulbere

Reflector: Din tablă de aluminiu oglindată

Sticlă de protecție: Termorezistentă, securizată

Montaj: Aparent (A)

La cerere și cu grătar de protecție (G)

Sursa: Sodiu (HST) și halogenuri metalice (HIT) de 250W și 400W

Dulie: E40

Standard: SR EN 60598-1

Application:
General lighting for medium height spaces (up to 6-8m)

Description:

Body: Powder painted steel sheet

Reflector: Mirrored aluminum sheet reflector

Protective glass: Thermoresistant

Mounting: Visible mounting (A)

On request may be fitted with protective grid (G)


Source: Sodium (HST) and metallic halides (HIT) 250W, 400W

Socket: E40

Standard: SR EN 60598-1




Grătar protecție/protective grid
Cod / Code: 01107874




pg.316



montaj aparent / visible mounting

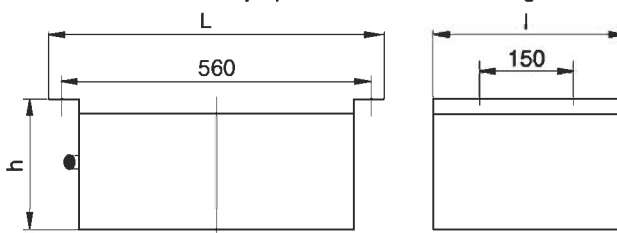

Dimensiuni de montaj aparent/
Visible mounting dimensions



Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]			Accesorii/ Accessories	Masa/ Weight [kg]	Lampa/ Lamp
			L	l	h			
250W halogenură metalică / metal halide	30661007	min. 0.92	580	380	178.5	grătar/grid	13.55	HIT
250W sodiu / sodium	34661003	min. 0.92	580	380	178.5	grătar/grid	13.55	HST
400W halogenură metalică / metal halide	30671007	min. 0.92	580	380	178.5	grătar/grid	13.55	HIT
400W sodiu / sodium	34671003	min. 0.92	580	380	178.5	grătar/grid	13.55	HST
250W halogenură metalică / metal halide	30661005	min. 0.92	580	380	177.5	-	13.00	HIT
250W sodiu / sodium	34661001	min. 0.92	580	380	177.5	-	13.00	HST
400W halogenură metalică / metal halide	30671005	min. 0.92	580	380	177.5	-	13.00	HIT
400W sodiu / sodium	34671001	min. 0.92	580	380	177.5	-	13.00	HST