



230V / 50Hz	IP 64		1809		II2G	Exde II		RoHS	18W / 36W
-------------	-------	---	------	--	------	---------	---	------	-----------

Domeniul de utilizare: Iluminat în medii cu pericol de explozie din grupa II, zona 1 și 2, temperaturi ambiante –5 +40°C

Descriere:

Corp: Carcasa din aliaj de aluminiu turnat sub presiune vopsit galben

Tub dispersor: PC
Reflector: din tablă de oțel vopsit alb (CFS-04)

Introducător de cablu cu etanșare prin garnitură de cauciuc pentru diametru 11-14mm
Secțiunea maximă a conductorului 2.5mm;

Număr de borne: 3(N,L,PE)

Montaj: Semistaționar, conectare individuală sau în șir (CFS-03 M)

Protecție antiexplozivă: II2G,Exde II
- d - capsulare antideflagrantă la compartimentul aparataj și optic
- e - securitate mărită la cutia de borne

Sursa: Tub fluorescent (T8)

Dulie: G13

Certificat*:
SECEExNMATEx.2004.12021X +A1/2007(CFS-03)
SECEExNMATEx.2003.12234X +A1/2007(CFS-04)

Standard: SR EN 60598-1
SR EN 60079-0
SR EN 60079-1
SR EN 60079-7

Application: Lighting of environments with explosion danger group II, zone 1 & 2, ambient temperature -5 +40°C

Description:

Body: Diecast aluminum alloy yellow painted

Diffuser tube: PC
Reflector: white painted steel sheet reflector(CFS-04)

Cable entry with rubber sealing gasket for cable diameters between 11-14mm
Maximum cross-section of the wire: 2.5mm

No. of terminals: 3(N,L,PE)

Mounting: Semi-stationary mounting; connected individually or in row (CFS-03 M)

Explosion proof protection:
II2G,Exde II
- d - flameproof enclosures of the gear and optical compartment
- e - increased safety of the terminal box

Source: Tubular fluorescent lamp(T8)


Socket: G13

Certificate*:
SECEExNMATEx.2004.12021X +A1/2007(CFS-03)
SECEExNMATEx.2003.12234X +A1/2007(CFS-04)

Standard: SR EN 60598-1
SR EN 60079-0
SR EN 60079-1
SR EN 60079-7




* produs supus recertificării. Pentru numărul certificatului contactați producătorul
* product subject to re-certification. For updated certification number please contact the manufacturer




pg.314



CFS-03-118
(CFS-03-136)



CFS-04-118
(CFS-04-136)

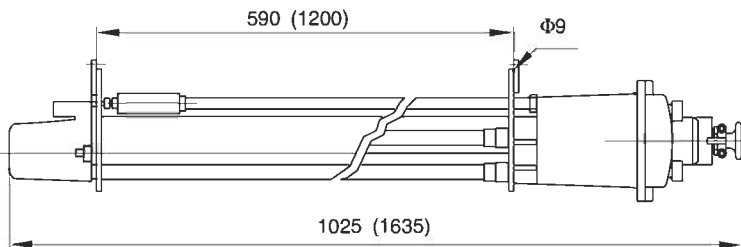

	Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Clasa de temperatură/ Temp. class	Gr. de mediu/ Environemental group	Masa/ Weight [kg]	Lampa/ Lamp
CFS 03	1x18W	22231003	min. 0.92	T5	II A, B	7.50	 φ 26
CFS 03 M	1x18W 2 introducătoare/ with 2 insertions	22231010	min. 0.92	T5	II A, B	7.60	
CFS 03	1x36W	22241003	min. 0.92	T4	II A, B	10.00	
CFS 03 M	1x36W 2 introducătoare/ with 2 insertions	22241010	min. 0.92	T4	II A, B	10.10	

	Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Clasa de temperatură/ Temp. class	Gr. de mediu/ Environemental group	Masa/ Weight [kg]	Lampa/ Lamp
CFS 04	1x18W	22231006	min. 0.92	T5	II A, B	7.60	 φ 26
	1x36W	22241006	min. 0.92	T5	II A, B	10.20	

Produsele antiex se livrează echipate cu sursă / Explosionproof products supplied with lamps included