



EN 60068-2-29	230V / 50Hz	IP 64			960°C	CE	RoHS	49W
---------------	-------------	-------	--	--	-------	----	------	-----

Domeniul de utilizare: Iluminatul de interior unde se cere grad de protecție IP64 (hale industriale, spații ample și depozite)

Descriere:

Corp: Armătură metalică din tablă de oțel vopsită cu pulbere albă

Reflector: Din tablă de aluminiu oglindată

Dispersor: Din sticlă securizată

Ramă: Metalică vopsită cu pulbere cu dispersor din sticlă specială securizată transparentă

Montaj: Suspendat

Sursă: Tuburi fluorescente (T5)

Dulie: G5

Standard: SR EN 60068-2-29

Application: General indoor lighting where IP 64 degree of protection is required (industrial spaces, large spaces and warehouses)

Description:

Body: Steel armature coated with white powder

Reflector: Mirrored aluminum sheet reflector

Diffuser: Tempered glass

Frame: Metallic frame powder coated with transparent tempered glass diffuser

Mounting: Suspended


Source: Tubular fluorescent lamp (T5)

Socket: G5



Standard: SR EN 60068-2-29



NOU!
NEW!



pg.311

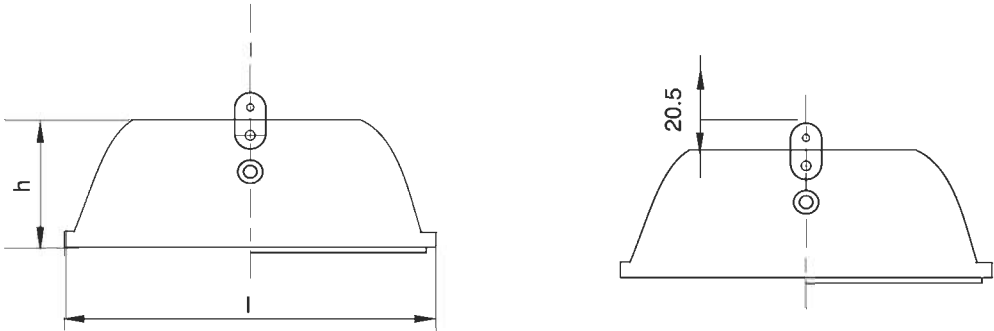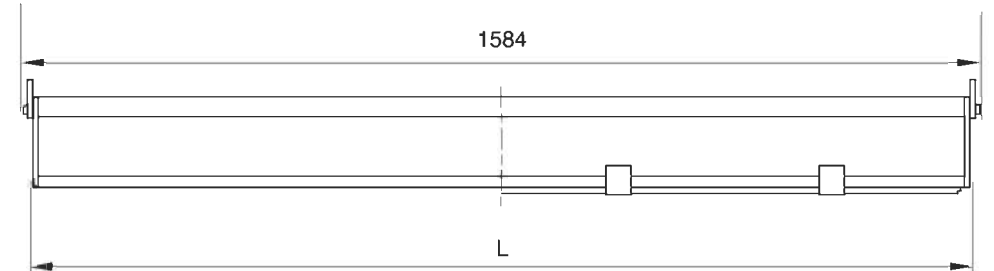

Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]			Masa/ Weight [kg]	Lampa/ Lamp
			L	l	h		
6x49W	21456001	min. 0.95	1551	430	151	20	T5 ϕ 16

