Actinic BL TL/TL-D/T5

Actinic BL TL MINI 4W/10

With an optimized performance to attract most insects, Actinic BL TL, BL TLD and BL T5 lamps are the ideal choice for electronic insect killer systems. They are also suitable for photopolymerization and reprographic processes. A wide choice of wattages and a special 200degree internal reflector version are available. In addition, Philips provides single-ended compact and T5 Actinic lamp versions as well as a circular Actinic lamp. For extra safety, there is a special shatterproof "Secura" option which ensures that all the lamp's glass and components are retained in a special outer sleeve in the case of accidental breakage. Hence, product designers have a high degree of flexibility in choosing the best fitting solution for their needs – including compact designs. What's more, as a 100% lead-free and lowmercury product these lamps also provide a responsible environmental choice.

Product data

• General Characteristics

Cap-Base	G5
Bulb	T5
Useful Life	5000 (max) hr
Life to 50% failures	8000 hr
EM	

• Light Technical Characteristics

Color Code	10
Color Designation	Actinic
(text)	
Depreciation 2000	35 %
hours	

• Electrical Characteristics

Lamp Wattage Lamp Wattage Tech- nical	4 W 4.5 W
Lamp Voltage	29 V
Lamp Current	0.17 A

• Environmental Characteristics

Mercury (Hg)	4.4 mg
Content	

• UV-related Characteristics

UV-B/UV-A (IEC) 0.2 %

UV-A Power (IEC) 0.6 W

• Product Dimensions Base Face to Base Face A Insertion Length B Overall Length C

135.9 (max) mm

140.6 (min), 143 (max) mm 150.1 (max) mm 16 (max) mm


• Product Data

Diameter D

Order code Full product code Full product name Order product name Pieces per pack Packing configuration Packs per outerbox Bar code on pack -EAN1 Bar code on intermediate packing -EAN2 Bar code on outerbox - EAN3 Logistic code(s) -12NC Net weight per piece 92800001030 92800001030 Actinic BL TL MINI 4W/10 Actinic BL TL MINI 4W/10 1 10X25CC 250 8711500951427 8711500951434 8711500951441 928000001030 18.600 gr




Dimensional drawing




TL G5					
Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)

TL 4W/10 135.9 140.6 143 150.1 16						
	TL 4W/10	135.9	140.6	143	150.1	16



G5

Photometric data

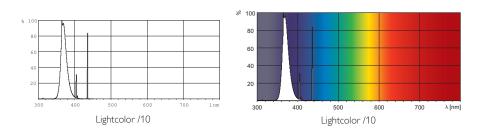



 $\ensuremath{\textcircled{}^{\circ}}$ 2012 Koninklijke Philips Electronics N.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting