

EN 60598-1	48V	230V / 50Hz	IP 66	IP 44	IK 08			CE	4W
			borne/terminals			230V	48V		



Domeniul de utilizare: Balizarea obstacolelor aeriene fixe sub 3000 m alt. Conformitate cu Convenția Internațională de Aviație Civilă - ICAO Aerodromes anexa 14 vol.I, paragraful 6.3 ediția Nov. 1999: lampa de balizaj de Tip A cu intensitatea luminoasă de 10cd (+6°....+10° începând de la planul orizontal), deschidere verticală a fasciculului > 10°. Unghiul orizontal de distribuție a intensității luminoase este de 360°

Descriere:

Carcasa: Din PC

Dispersor: (filtru) din PC roșu

Borne: Pentru conectarea la distanță a unui LED verde de semnalizare în cazul unei defecțiuni

Montaj:
- pe teavă cu diametrul de 60 mm printr-un colier
- pe flanșă din tablă de oțel zincat cu 4 șuruburi M6x45

La cerere se poate echipa cu kit pentru iluminat de siguranță

Sursa: 4 LED-uri de 1W alimentate independent. Defectarea unuia nu compromise funcționarea celorlalte.

Standard: SR EN 60598-1

Application: Beaconage of fixed aerial obstacles under 3000 m alt. According to the International Convention of Civil Aviation - ICAO Aerodromes, annexe 14 vol.I, paragraph 6.3, Ed. Nov. 1999: obstruction lamp Typ A with luminous intensity of 10cd (+6°....+10° beginning from horizontal plan), vertical fascicol opening > 10°. Horizontal angle of the luminous intensity distribution is of 360°.

Description:

Body: PC

Diffuser: Red PC diffuser (filter)


Terminals: For connecting a green LED to signalize any lamp failure from the distance

Mounting:
- by a collar on a pole with 60 mm diameter
- by a zinc - plated steel sheet flange with 4 screws M6x45

On request may be fitted with kit for emergency lighting

Source: 4 LEDs of 1W independently connected. The failure of one LED does not affect the functioning of the other three

Standard: SR EN 60598-1

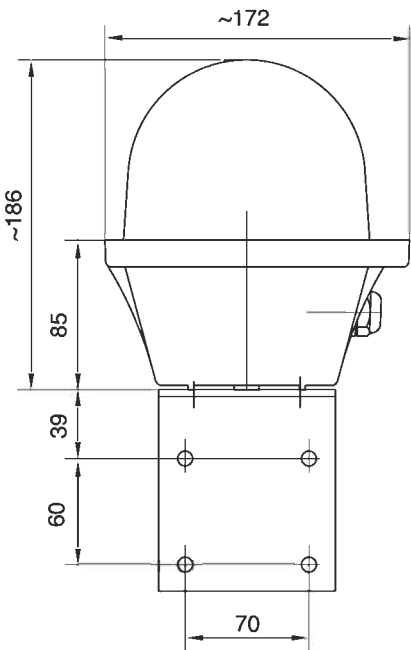

Tip/Type	Cod produs/ Product code	Mod de fixare/ Fastening mode	Masa/ Weight [kg]	Lampa/ Lamp
4W 48V	46614001	cu colier sau flanșă/with collar or flange	2.20	LED 
4W 230V	46614002	cu colier sau flanșă/with collar or flange	2.20	